



**Bugle
Head**

Fine Thread Drywall Screws

Self-Tapping Screws

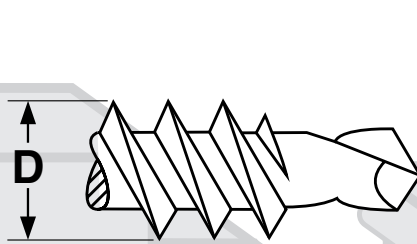

**Fine Thread Drill Point
Drywall Screw**

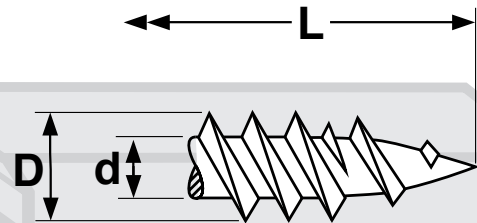

**Fine Thread Sharp Point
Drywall Screw**

THREADS FOR FINE THREAD DRYWALL SCREWS

Screw Size	Threads per inch	D		d	
		Major Diameter		Minor Diameter	
		Max.	Min.	Max.	Min.
6	18	.144	.135	.102	.096
7	16	.156	.147	.113	.106
8	15	.170	.161	.123	.116
10	14	.201	.193	.158	.152
Tolerance on Length					
		Up to 1 in. incl.: -0, +0.060		Over 1 in.: -0, +0.100	

Description	<i>Fine thread Drywall--Sharp point:</i> A bugle head screw with twinfast thread, extra sharp point and black phosphate finish. <i>Fine thread Drywall--Drill point:</i> A bugle head screw with twin lead spaced thread, self drilling point and black phosphate finish.
Applications/ Advantages	<i>Fine thread Drywall--Sharp point:</i> For attaching drywall to metal studs from 25 gage through 20 gage thick. Longer sizes are ideal for multiple layers or insulation. <i>Fine thread Drywall--Drill point:</i> Will drive easily through drywall, drill a hole in a steel stud up to 14 gage thick, and form its own mating thread. Can also be used for attaching plywood or insulation board to 14 gage metal.
Material	AISI 1018 or equivalent steel
Heat Treatment	Screws shall be quenched in liquid and then tempered by reheating to 650°F minimum.
Case Hardness	Rockwell C44 minimum
Plating	See Appendix-A for information about the coating of drywall screws.